

COMMERCIAL INSPIRATION

DESIGN GUIDE

- · Linear Lighting Systems
- Decorative Pendants
- · Decorative Ceiling Mounts
- Decorative Wall Mounts
- Decorative Recessed Options






SCALE WITHOUT WEIGHT



Current @ | LITECONTROL












Elegant from all Angles

Subtle details define the architectural environment, and subtle details define Aira as well. A clean read of brightness at the leading edge of the extruded rail provides definition. A design detail that helps define the fixture, and therefore your space, as exceptional.

Viewing life from all angles provides a confidence, an understanding. Viewing Aira from all angles provides the same.



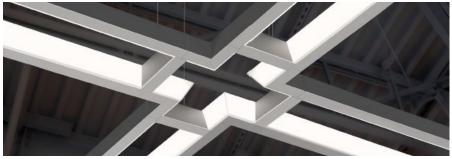

Define your Space

Space definition allows one to interpret the environment.

Aira's luminous, open-center system connectors enable this definition without sacrificing the spirit of the luminaire. The flexibility your environment demands, executed with the thoughtfulness Aira demands.
























Current @ | LITECONTRO
















- 88L-P-D-3-8-04-WOL-C5-35K-D080-D01-1C-UNV-FA1 - QTY x 2
- 88L-P-D-3-A4/90-WOL-C5-35K-D080-2. D01-1C-UNV-FA1 - QTY x 4
- 88L-P-D-3-4-04-WOL-C5-35K-D080-D01-1C-UNV-FA1 - QTY x 2
- 88L-P-D-3-A4/90-WOL-C5-D100-D01-1C-UNV-FA1 - QTY x 4



FEATURES


- Variable Intensity technology provides a range of specifiable outputs and resulting fixture wattages
- 950 lumens max. See performance data table for additional information.




A: (QTY 2) 88L-DW-D-3-2-02-WOL-C4-35K-D080-D01-1C-UNV-FA1 B: (QTY 2) 88L-DW-D-3-8-08-WOL-C4-35K-D080-D01-1C-UNV-FA1 C: (QTY 4) 88L-DW-D-3-A4/90-WOL-C4-35K-D080-D01-1C-UNV-FA1



A: (QTY 4) 88L-DW-D-3-A4/90-WOL-C5-35K-D100-D01-1C-UNV



Current @ | LITECONTROL



Fixture Lengths

Ceiling Type

Drywall Trimless 15/16" LG 9/16" NG 9/16" Screw Slot

Direct

Fixture Distribution

Downlight Distribution

Downlight Diffuser

Asymmetric Batwing

Soft Diffuse

Regressed

Asymmetric

Light Silver

Carbon Black

Custom Color

Machined Aluminum

Textured Camera Black

Batwing Matte White Textured Matte White

Drop

Color Temperature Lambertian

30K 35K 40K 80CRI 90CRI SpectraSynchi

Outputs

Direct 2L: 300-1000

Driver 0-107 Lutron Dali


Controls NX Lighting Controls Zigbee Daylight


Occupancy

Additional Options

Chicago Plenum Rates IC rated



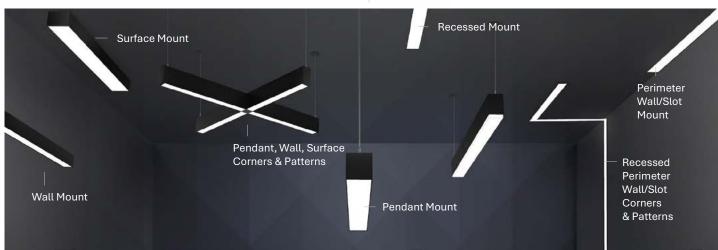

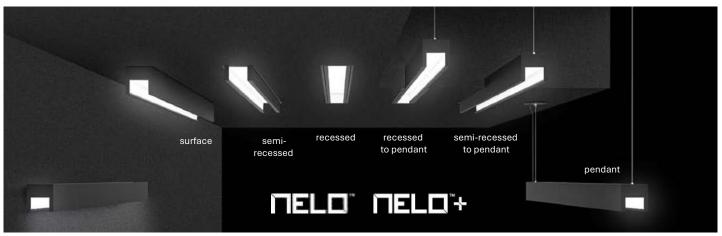








Current @ | LITECONTRO

NOTE 67L

Fresh and contemporary styling that brings direct illumination, performance and versatility, all within a slim profile. Providing three lens design selections with Pendant, Surface and Wall mounting options to complement a variety of environments and applications.









The BELL lens adds a stylish flair with crisp corners and soft arches.



The SQUARE lens evokes a classic look in a modern form.




Variable Intensity® **Technology**

- SpectraSync™ Color Tuning
 Technology available
 Up to 127 LPW
 Output range from 550-2000
 lumens/ft
- & Wall Mount
- Removable Lens

Lens Removal



Row Mounting Row connection is simple and straightforward, with a tight









FEATURES

- Variable Intensity technology provides a range of specifiable outputs and resulting fixture wattages
- 2 SDCM color consistency
- Up to 127 LPW efficacy
- Output range from 550 to 2000 lumens/ft
- Removable Lens for ease of accessibility and installation











CONTROLS TECHNOLOGY















Square

Bell

SERVICE PROGRAM

QS10



Current @ | LITECONTRO

SAE

Litecontrol's SAE Program provides a Simple, Affordable & Efficient Process and Product Selection.

The portfolio of product is economically designed and priced for competitive positioning in a variety of applications. The SAE Program is service centric with unique program attributes, including ease of specifying and ordering.

SIMPLE

- Straightforwardness of selection, process and installation
- Focused on key features for precision application

AFFORDABLE

- Simplicity of design
- Competitively priced

EFFICIENT

- DesignLights Consortium™ (DLC®) qualification on select products
- Vi Technology on select products



SAE 100 LINEAR

SAE101 - Pendant





Wall Mount

SAE103 - Pendant

SAE102 - Pendant





Wall Mount



SAE104 - Pendant



Wall Mount

SAE106 - Pendant

SAE 200 PERIMETER

SAE201 - Concealed Cove







SAE202 - Soft Glow Lens

w/ Baffle Regressed





SAE301 - 2X4





2x2

SAE105 - Pendant

Wall

Mount

۱۸//

Baffle





Housing

Perf



End Cap

100%

Indent





End Cap



HOSPITALITY

Provides flexibility to create multiple environments, whether multi-use spaces, common areas or guest suites.

EDUCATION

Empowers educators to tailor active environments and create a productive academic experience.

SpectraSync

SpectraSync™ is an easy and intuitive white tuning solution offered in two modes to accommodate a variety of applications.

Dim to Warm



Dim to Warm mimics the familiar warming effect that occurs with traditional incandescent sources as they are dimmed. (Available with 2200K-3000K)

Tunable White



Tunable White offers users the ability to tailor CCT to their personal preference, enhancing task visibility, material and colors, or the aesthetics of the space. (Available with 2700K-5000K or 2700K-6500K)

OFFICE

Customizes office space for personnel and business needs.

HEALTH & WELLNESS

Enhances the well-being of patients while balancing the requirements of the health care provider.




Current @ | LITECONTROL

WALL SLOT | 2000 LED



PERFORMANCE

Wall/Slot® 2000 LED delivers 7:1 vertical uniformity; a 50% improvement over conventional sources

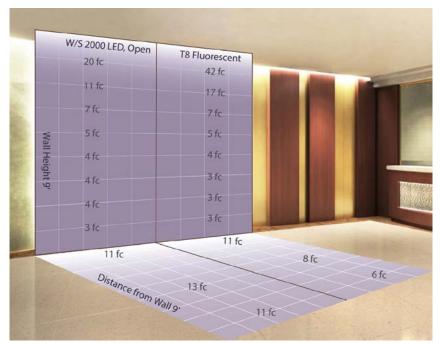

LUMEN OUTPUT

Nomenclature	Nominal Lumens/Ft	Nominal Watts/Ft	Efficacy
D025	250	3.5	71
D065	650	9.7	67
D080	800	12.6	64

Output and watts vary based on product configuration; for exact lumens and watts contact Litecontrol

COLOR RENDERING

CCT	CRI	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	1114	R15
30K	83	81	90	96	81	81	86	84	62	12	75	80	68	83	98	75
35K	83	81	88	94	82	81	84	86	65	14	72	80	63	82	96	75
40K	83	82	90	95	81	81	85	87	66	14	75	79	59	84	97	76


LED Color Variation

2 step MacAdam ellipse, both within the fixture and fixture-to-fixture.

Wall/Slot® 2000 LED, Open Maximizes Efficiency




Typically used where increased perceived brightness at the ceiling plane is advantageous. Examples: Floating ceiling, wayfinding



20L-Cx-35K-D030-04-D10 Wall/Slot® 2000 LED, 4', 3500K, 300 lum/ft, 6W/ft, matte white finish, 0-10V dimming driver at 100% output

COLOR TEMPERATURE





ARC	
KLEAN EDGE COVE	
RINGS	LA CANADA LA CAN
DRUMS	
FRAME	
HYDRO	
AQUAS	



ZYNN 2" LINES + ARCS



PAVO 4"



ZYNN 2" RING



PAVO 2" HORIZONTAL



VALLEJO LC 8", 10", 12"



ZYNN RING







NOVATO LINES + ARCS




NOVATO LINES + ARCS



SPHERES



NOVATO LINES + ARCS

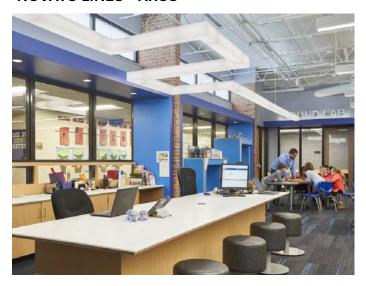

NOVATO 2" LINES + ARCS



SPHERES








NOVATO LINES + ARCS



ZYNN RING




LORIS

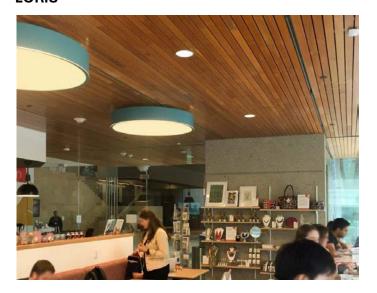

NOVATO DRUM



ZYNN RING

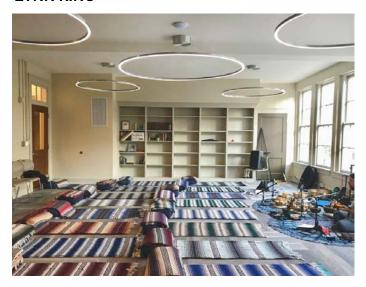

PAVO 2"








VALLEJO LC



NOVATO RING

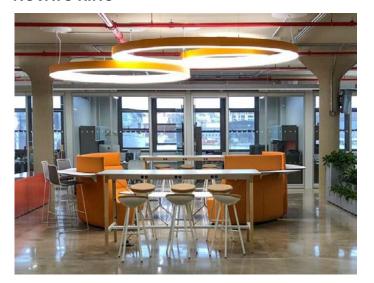

ZYNN RING



LONDON



NOVATO RING



ZYNN 2" LINES + ARC







ZYNN 2" LINES + ARC



NOVATO RING



ZYNN RING




ZYNN 2" LINES + ARC



NOVATO LINES + ARC



ZYNN RING

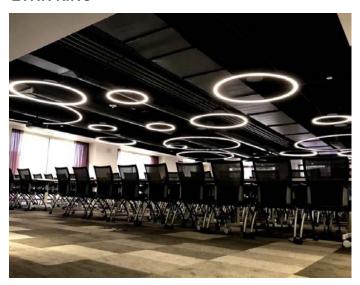






NOVATO ORBIT | NOVATO RING



PAVO 8", 10", 12"

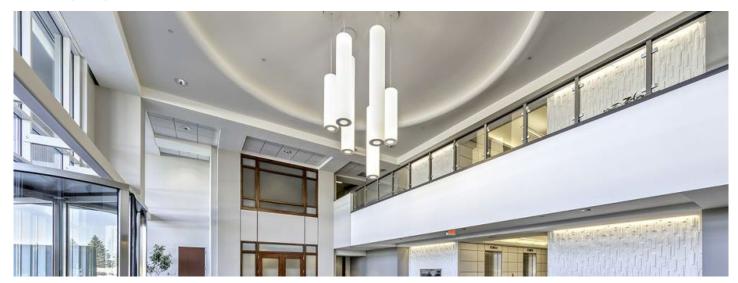


SPHERES





SPILIGHTING

YD CUSTOM DIVISION

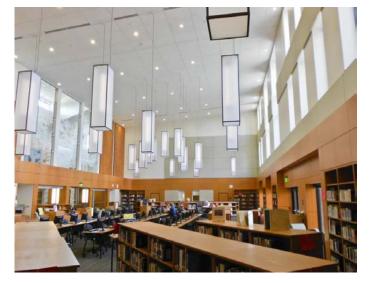

NOVATO RING



PAVO 4"



PAVO 2"



VALLEJO LC 8"



PAVO 8"





PAVO 8", 10", 12"



PAVO 6"



PAVO 4"




CUBES-PENDANT | CUBES-CEILING



PAVO 8", 10", 12"




PAVO 2"

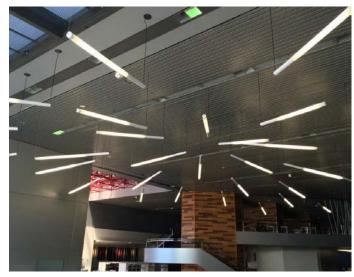





PAVO 10"

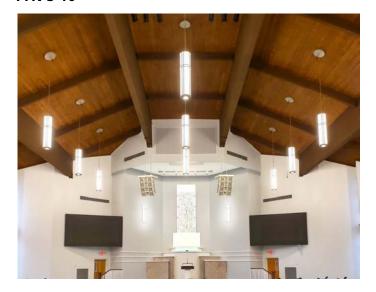

ECHO REFLECTIONS




LIGHTRUSS LED - UPGRADE



PAVO 6"



SAVANNAH

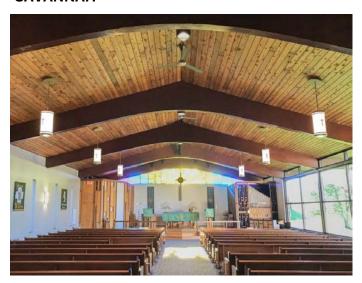


ECHO VELOCITY 3.5







LYON | LYON-EXT

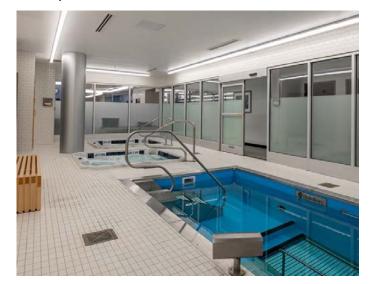

LIGHTRUSS LED



STYK



ECHO SHAPES 9.0



ECHO EFFECT



STYK EXTERIOR







RAIL 4 INDOOR



RAIL 4 INDOOR



RAIL 4 INDOOR



PLANAR (S2E)



ORBIT II (O2DS)







RAIL 2 (RM2D)



RAIL 4 INDOOR (RM4D)



RAIL 2 (RM2D)



PLANAR (S2E)





RAIL 4 INDOOR



RAIL 4 INDOOR



RAIL 2 (RM2D)



RAIL 4 INDOOR







RAIL 6 METRO



FLEXI (BLD)



RAIL 2 ACOUSTIC



RAIL 4 PERIMETER



RAIL 2 ACOUSTIC



RAIL 2 ACOUSTIC







MULLION



NATA (NATADI)







RAIL 4 OUTDOOR



RAIL 4 OUTDOOR



RAIL 4 OUTDOOR









MJ CIRCLE



CY & CY3



WAV



FRICI EVO



CY & CY3



FRICI VERT







TORO



SOL

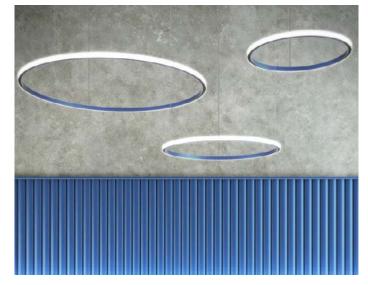

TORO

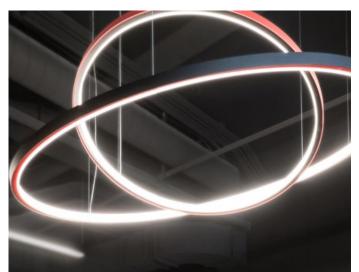

CY & CY3



MJ POLY



MAX LIFT+




MINI MAX





BALL

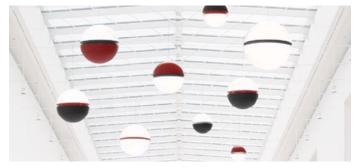

VORTEX



DRUM



DOT & LINE



AVO



RA



ВООР



ROCCO



ASTER



BOW







DRUM



FOLD



NOVA



STELLA



DRUM



FOLD STACKER



STELLA





FRICI 2



FRICI 2





KEPLER



THORAH



COHEN



DANZA



ALBANY



SERAPH



VIVIEN



MATERA



ROSSI



ARLINGTON



VOLTIK



ALTESA



TRENTO



COBURG



FORSTER




ATOMO



CAMPOBASSO



SASSI



SANTANA



VERDURA





SPUNTO





CAMENO



LAVERTON



TRIAS



ADMIRAL



INIZIO



VAUGHAN



PROSPECT



TRAITON



BELMONT



CIRCOLO



JALORE





SUE-ANNE



DENDELIO



NORWAY



LAHAR



CONSTRUCT




BARLETTA





CERCIO - RINGS











 $LUM \equiv N$ WARM

ZOOMBAR - FIELD ADJUSTABLE BEAMS









EROS – LINE VOLTAGE LINEARS









LOW VOLTAGE LINEAR SOLUTIONS









ALINA – LOW VOLTAGE TRACK









BORIS - CYLINDERS









DESFIOLI – ARCHITECTURAL DOWNLIGHTS









alphabet

light the 🏝 fun up!

NU PINHOLE



CYLINDERS



NU4RD HYPERBOLIC



750 HANDRAIL



THETA HANDRAIL PUCK

NU PINHOLE & GX25 MONOPOINT



SHOPLINE 4



SHOPLINE



SHOPLINE - 3







EMILIA



JAZZ SURFACE ROUND



DELFINA

BINA SQUARE RECESSED



LX PRO SURFACE

BELLA



JAZZ SURFACE ROUND



QB2



LX PRO MONOPOINT



QB



ENCORE




JAZZ PENDANT ROUND



CX10 PENDANT



BOBO 1



CLASSIC





MOTO ZERO



OUTDOOR QB



OUTDOOR QB





GILT



KRYPTONITE



RIDDLE



HUSTLER



BLACK JACK



ILIOS



VESTA



TEMPEST



BOUGH



BATTLESTAR



TIDAL



SYDNEY



DOUBLE BUBBLE



STORMY



CHAOS







CONTOR III

MARTY





ORION



ORB



ARKANSAS LIGHTING

TABLE LAMP



FLOOR LAMP



CONTOUR W

DEW DROP 1

TITAN IV







CEILING MOUNTED PENDANT











OUTDOOR FIXTURE







LUMICLOUD™



LUMIpano™




LUMICLOUD™




LUMICLOUD™ BESPOKE



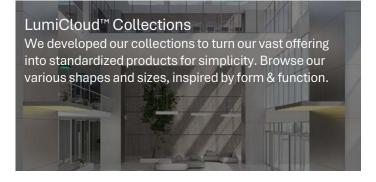





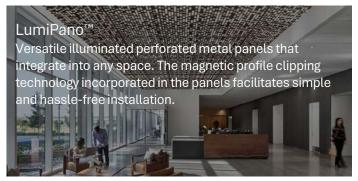










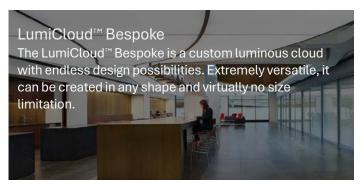







BRINGING ARCHITECURE TO LIGHT





HYATT PLACE SAN JUAN/CITY CENTER



KINGSTON, ON CITY HALL

BANORTE KOI TOWER





ATLANTIC BRIDGE

MERCEDES BENZ STADIUM



MIRAFLORA VISITOR CENTER

BANK OF AMERICA

CORPORATE CENTER



SKYLINE GARAGE



CENTERPOINT ENERGY TOWER



OCEAN FINANCIAL CENTER, **SINGAPORE**



8500 BURTON WAY, **BEVERLY HILLS**



LA COSTE, ABU DHABI



CITY OF LINDSAY, CA



SAN DIEGO COUNTY **ADMINISTRATION BUILDING**



TAO POOL, AT THE VENETIAN. **LAS VEGAS**



LOGAN COUNTY COURTHOUSE LINCOLN, ILLINOIS



ILLNOIS STATE TREASURERS OFFICE - SPRINGFIELD



PIER WEST -**NEWWESTMINISTER, BC**



LEFRAK POINT LIGHTHOUSE-JERSEY CITY NJ



JOHN HEXTALL BRIDGE - CALGARY, SHAKESPEARE ON THE **ALBERTA**



SASKATCHEWAN, SASKATOON



GENE LEAHY MALL AT THE RIVERFRONT - NEBRASKA



AVENTI BEERSE HEADQUARTERS - ANTWERP, BELGIUM



































































































































EVOLVE



























































































LIGHT.

































