



GS Lighting Group
A division of Gross Sales Ltd.

30+
YEARS



2025-2026

INDUSTRIAL LIGHTING

DESIGN GUIDE

- Light-heavy Manufacturing Environments
- Warehouses
- Cold Storage
- Food Processing Facilities
- Pharmaceutical

INDUSTRIAL LIGHTING APPLICATIONS: WAREHOUSE/LIGHT-MEDIUM MANUFACTURING ENVIRONMENTS



PHB Series

Selectable Lumen & CCT
Linear High Bay



CONSTRUCTION

Housing:	Die-cast Aluminum
Lens:	Diffused Polycarbonate
Weight:	Size 1X: 5.0 lbs (2.3 kg) Size 2X: 6.5 lbs (2.9 kg)

PERFORMANCE

Distribution:	Narrow (55°)**, Medium (90°) and wide (120°)**
Lumens:	1X: Selectable 15,000 / 18,000 / 24,000 2X: Selectable 27,000 / 30,000 / 36,000
Efficacy:	Up to 161 LPW
CCT:	Selectable 4000K / 5000K
CRI:	80

1X -40°C to +55°C (-40°F to 131° F)
2X -40°C to +50°C (-40°F to 122° F)

Columbia LIGHTING

CRN2

Wet Location High Bay



FEATURES

- Efficient wet location high bay
- Suitable for a variety of areas including warehouses, gyms, covered outdoor areas, garden centers and mezzanines
- Polycarbonate lens with reflector options provide glare reduction and aesthetic customization
- Efficacy up to 144 LPW assures energy savings over traditional high bay luminaires
- Offers lumen packages from 14,000 to 38,000 lms for proper illumination on a variety of high bay applications

Output version	Ambien Temp Range	Dimming Range
14,000 (LX) 21,000 (MM)	-40° to 55°C	100% to 10%
28,000 (MV) 34,000 (MX)	-40° to 50°C	
38,000 (HM)	-40° to 45°C	



PRC Series

LED IP65 Selectable
Round High Bay



CONSTRUCTION

Housing:	Die-cast Aluminum
Lens:	Clear Polycarbonate (90°)
Paint:	Powder coat painted housing No glass in housing or lenses
Weight:	6.5-9.5lbs (2.95-4.30kg)
Optical Assembly:	Optimal polycarbonate refractor, drop lens, or aluminum reflector

With Sensor: -30°C to 50°C Without Sensor: -40°C to 50°C

OPTICAL SYSTEM

Lumens:	1X: Selectable 15,000 / 18,000 / 21,000 2X: Selectable 24,000 / 30,000 / 34,000
Wattage:	100-240W
Efficacy:	Up to 160 LPW
CCT:	Selectable 4000K / 5000k
CRI:	80
Glare Rating:	URG<28



Columbia LIGHTING

CSL

Striplight



FEATURES

- 4ft and 8ft lengths
- Switchable Lumen Technology
- Switchable CCT, 3500/4000/5000K
- Captive Lens/LED engine assembly
- 80+ CRI
- 0-10V dimming to 10%
- Surface mount on wall or ceiling
- Universal voltage (120-347V)
- Junction box cover included
- Field Installable behind-the-lens microwave sensor accessory

	Setting	Lumens			Watts			LPW 4000k	
		3500k	4000k	5000K	3500k	4000k	5000k	3500k	5000k
4' LED Striplight 4400/4850/5300 Switchable Lumens, 3500/4000/ 5000K Switchable CCT,0-10V dimming, 120-347V	LOW	4400	4500	4400	32.5	135	138	135	
	MED	4850	4950	4850	36	135	138	135	
	HIGH	5300	5400	5300	41	129	132	129	
8' LED Striplight 8000/ 8800/9600 Switchable Lumens, 3500/ 4000/ 5000K Switchable CCT, 0-10V dimming, 120-347V	LOW	8000	8300	8000	65	123	128	123	
	MED	8800	9000	8800	72	122	125	122	
	HIGH	9600	10000	9600	81	119	123	119	

INDUSTRIAL LIGHTING APPLICATIONS: HEAVY MANUFACTURING / AUTOMOTIVE ENVIRONMENTS



ABV4 Series

LED High Bay Lighting



CONSTRUCTION

Housing:	Combination steel and aluminum
Lens:	Polycarbonate, Acrylic
Paint:	Powder coat painted housing No glass in housing or lenses
Weight:	10-11 lbs (4.55-4.99 kg) per module (use dimensional drawings)
Optical Assembly:	Polycarbonate reflective optics with optional lens

-30°C to +55°C (-22°F to 131°F)

OPTICAL SYSTEM

Distribution:	Wide, Wide Diffused (reduce Glare), Medium and narrow
Lumens:	9,000-90,000
Efficacy:	167-197 LPW typical
CCT:	3000K, 3500K, 4000L, 5000K
CRI:	70, 80, &90



ABR2 Series

Heavy Industrial High Bay & Low Bay Lighting



CONSTRUCTION

Housing:	Cast A380 Aluminum
Lens:	Polycarbonate or Glass
Paint:	Polyester powder coat with passivation layer
Weight:	21-49lbs (9.53-22.23kg)
Optical Assembly:	Reflective optics with flat lens

Operating Temperature: -30°C to +65°C

OPTICAL SYSTEM

Distribution:	120o, 90o, 55o, 30o, Glass, Clear PC, and Diffused lens options
Lumens:	9000-60000
Efficacy:	Up to 175 LPW
CCT:	4000K & 5000K
CRI:	70 & 80

Columbia LIGHTING

C65-LSCS

Linear High Bay



FEATURES

- Engineered for durability for light to heavy industrial environment while maintaining an aesthetically appealing look for commercial and industrial applications
- An ideal solution for the unknown with selectable lumen and CCT technology making it a versatile stock solution
- Offers lumens up to 33,000 with a max of 161 LPW
- Designed for Ambient temperature -40°C up to 65°C

Key Data	
Lumen Range	15,290-33,180
Wattage Range	100-210
Efficacy Range (LPW)	Up to 161
Reported Life (Hours)	L70@100,000



Columbia LIGHTING

LXEW

Enclosed and gasketed linear high bay



FEATURES

- Wide-body enclosed and gasketed 4' high bay
- IP65, IP66 and IP67 rated
- 1500 PSI High Pressure Hose down rating Fiberglass housing with F1 weatherability rating, standard
- UL Sanitation Certified per NSF Standards
- Stainless steel latching and mounting straps optional
- V-Hook mounting brackets included standard
- -40°C up to +50°C ambient operation; see table provided for details
- NEMA 4X housing
- IK10 rated when ordered with polycarbonate lens

Model	Size
LXEW Industrial Enclosed & Gasketed LED High Bay	4-4'

Colour Temp		Nominal Lumens	
30	3000K	L	11,000
35	3500K	M	15,000
40	4000K	MH	17,000
		H	21,000
50	5000K	HV	23,000
		V	30,000
		X	36,000



INDUSTRIAL LIGHTING APPLICATIONS: FOOD PROCESSING/CLEANROOM ENVIRONMENTS



ABN1 Series LED High Bay Lighting



CONSTRUCTION	Housing:	Cast A360 Aluminum
	Lens:	Polycarbonate
	Paint:	Powder coat painted housing
	Weight:	16lb (7.25kg)
	Optical Assembly:	LED optic array with refractive lens

- NOTES**
- UL 1598 Suitable for Wet Locations (IP65)
 - Safety: UL/cUL Listed
 - Ratings: NSF SPLASH ZONE rated, IP69K, IP66, NEMA 4X
 - Environmental: RoHS compliant
 - Packaging: Fixtures are individually packaged

OPTICAL SYSTEM	Distribution:	120°, 90°, or 60°, clear and 120° diffused lens options
	Lumens:	9000-28000
	Efficacy:	Up to 165 LPW
	CCT:	3000K, 3500K, 4000K & 5000K
	CRI:	80 & 90



Columbia LIGHTING

CRN2-LSCS Wet Location High Bay



- FEATURES**
- Switchable lumen and CCT technologies maximize inventory versatility and flexibility
 - 120-347V 0-10V driver
 - Optional 'plug and play' occupancy sensor is easily installed into the center of the fixture
 - Provides lumen packages from 15,500 to 35,040 lumens, allowing for use in a variety of applications including food processing, wash down, warehouses, gyms, garden centers and mezzanines
 - Two reflector options deliver glare reduction and aesthetic customization
 - Efficacy up to 162 LPW assures energy savings over traditional high luminaires

Key Data	
Lumen Range	15,500-35,040
Wattage Range	100-240
Efficacy Range (LPW)	Up to 162
Reported Life (Hours)	L70@50,000



- CERTIFICATION**
- All luminaires are built to UL 1598 standards, and bear appropriate cULus labels for wet locations
 - Ambient Operating Temperature range:
 - Without Sensor: (Standard) -40°C to 50°C (-40°F to 122°F)
 - With Sensor: -30°C to 50°C (-22°F to 122°F)
 - IP65 rated
 - IK07 impact rated
 - NSF Splash Zone 2- food equipment standard for non-food zones rated
 - NEMA 250 Type 4X rated

Columbia LIGHTING

CVT-LSCS Linear Vaportite



Description	Setting	3500k	Lumens 4000k	5000k
4' Linear Vapor Tight, Switchable Lumens (3500 /6500/7500): Switchable CCT (3500 /4000/5000K): 120-347V; 0-10v Dimming to 10%	LOW	5206	5586	5282
	MED	6072	6532	6164
	HIGH	6912	7452	7020
8' Linear Vapor Tight, Switchable (9600/10800 /12700): Switchable CCT (3500/ 4000K/5000K): 120-347V; 0-10v Dimming to 10%	LOW	8970	9620	9100
	MED	10125	10875	10275
	HIGH	11880	12780	12060

Columbia LIGHTING

LXEM Enclosed and Gasketed Fiberglass Extreme Environment



Key Data	
Lumen Range	2145-22,473
Wattage Range	20-183
Efficacy Range (LPW)	99-147
Reported Life (Hours)	L80/60,000

Columbia LIGHTING

LXEW Enclosed and Gasketed Linear High Bay



Model	Size
LXEW Industrial Enclosed & Gasketed LED High Bay	4-4'

Colour Temp	Nominal Lumens		
30	3000K	L	11,000
35	3500K	M	15,000
40	4000K	MH	17,000
50	5000K	H	21,000
		HV	23,000
		V	30,000
		X	36,000

INDUSTRIAL LIGHTING APPLICATIONS: HAZARDOUS INDUSTRIAL ENVIRONMENTS



AHH2 Series Hazardous Location Luminaire



CONSTRUCTION	Housing	Diecast aluminum
	Lens	Polycarbonate or glass lens
	Corrosion Resistant Layer:	Polyester powder coat with passivation layer
	Paint	White
	Weight:	21-49lbs (9.5-22kg)

- Operating Temperature: All models: -30oc to +60oc
- UL844 class 1, division 2, groups A,B,C,D.
 - UL1598A Inside Drip-proof type (Corrosive
 - "R" Finish)
 - 3,000hrs of ASTM B117 Salt Spray
 - NEMA 4X Enclosure Type

PERFORMANCE	Distribution:	120°, 90°, 55°, 30°, Glass, Clear PC and diffused lens
	Lumens:	9,000-60,000 lumens
	Efficacy:	Up to 165 LPW
	CCT:	4000K, 5000K
	CRI:	70 & 80 CRI



AH2A Series High Bay Lighting Hazardous Environments



CONSTRUCTION	Housing:	Low Copper A356 Cast Aluminum
	Lens:	Polycarbonate or tempered glass
	Paint:	Powder coat painted housing*
	Weight:	Up to 19lb (8.62kg)
	Optical Assembly:	Reflective optics with flat lens

- *No glass in housing or lenses if polycarbonate option is chosen
- UL598 Wet Location
- UL1598A Outside Type (Saltwater)
- UL844 Listed
- Class I Division 2 Groups A, B, C, & D
- Class II Division 1, Groups E, F, and G (glass lens only)
- Class II Division 2, Groups F & G
- Class III Division 1 & 2
- Simultaneous Presence

OPTICAL SYSTEM	Lumens	5000-18000
	Distribution:	360°, 180°, or wide distribution
	Efficacy:	Up to 179 LPW
	CCT:	4000K & 5000K
	CRI:	70

- UL8750 LED Equipment in Lighting Products
- CAN/CSA C22.2 No. 137-M1981 Listed
- NEMA 4X Enclosure Type
- IP66 Ingress Protection Rating
- Current's Limited 5-year warranty: See website



HEM LED



- FEATURES**
- Hazardous Enclosed and Gasketed Fiberglass Extreme Environment / LED
- Classifications: Class 1, Division 2, Groups A, B, C, & D
 - 4' and 8' sizes
 - 4800 – 16300 lumens
 - Lifetime of 60,000 hours at L80 for reduced facility maintenance
 - Low energy solutions
 - 3000K, 3500K, 4000K, 5000K LED CCT colors for improved visual acuity on site
 - Compatible with Dual Lite emergency inverters

Product availability – Nominal Lumens

Size	Lumen Package	Nominal Lumen Range (DFA LENS)	Nominal watts (Highest)	Lumens/Watt (Highest)	Max Temp
4	ML	4,850-5,350	47	114	40-C
	HL	5,800-6,400	52	123	40-C
8	VL	7,350-8,150	68	120	40-C
	ML	9,700-10,700	94	114	40-C
	HL	11,600-12,800	104	123	40-C
	VL	14,700-16,300	136	120	40-C

DLC LISTED Lumens vary according to color temperatures and other factors. See specific photometric test(s). Output levels based on the DFA lens



LED Retrofit Lamps Approved for Hazardous Locations

A Smart, safe switch from HID



Current's LED lamps are certified for use in a variety of hazardous locations: Class I, Division 2, Groups A, B, C, D Class II, Division 1, Groups E, F, G Class II, Division 2, Groups F, G

RATED FOR:
CLASS I, DIVISION 2, GROUPS A, B, C, D CLASS II, DIVISION 1, GROUPS E, F, G CLASS II, DIVISION 2, GROUPS F, G

INDUSTRY-LEADING
LUMEN Output in compact form

- UL-CERTIFIED FIXTURES***
- GE Lighting Filtr-Gard® H2 Series
 - GE Lighting Powr-Gard® H9 Series
 - Crouse-Hinds Champ® VMV
 - Appleton Mercmaster™ II Appleton Mercmaster™ III Hubbell Killark® VM Series
 - Holophane Petrolux® P3M
 - Holophane Petrolux® II PETL
 - Thomas & Betts Hazlux® 3 Series



50,000-hour rated life
2.5x longer life than HID

50% less energy usage
with similar light output
- up to 23,500 lumens

E39 socket adapter
included with E26
base lamps

High maximum
temperature ratings
21W: 65°C | 35W: 55°C
45W: 45°C | 80W: 55°C
150W: 40°C
Minimum starting
temperature: -20°C

INDUSTRIAL LIGHTING APPLICATIONS: HAZARDOUS INDUSTRIAL ENVIRONMENTS

Hazlux® AH LED series



FEATURES

Explosion-proof, shock and vibration resistant lighting fixture, designed for use in marine and wet locations, and a variety of hazardous areas.

- Class 1 Division 1, Class 2 Division 1, Class 3
- Life expectancy: 130,000
- Certified for use in marine locations
- Corrosion resistant copper free aluminum housing
- Lumen output from 6,500 lumens to over 8,500 lumens
- High temperature silicone gasketing
- Shock and vibration resistant



CERTIFICATION

Class I:	
Division 1:	Group B, C, D
Division 2:	Group A, B, C, D
Class II:	
Division 1:	Group E, F, G
Division 2:	Group E, F, G
Class III:	

Classification may vary depending on the product configuration. Please follow catalogue information and exceptions.

Hazlux® LI1 LED series



FEATURES

Extremely durable and water-tight, the LI1 Series has a slim and compact design. This explosion-proof fixture can withstand the most demanding hazardous location environments like paper mills, chemical facilities, and wastewater treatment plants.

- Class I Division 1, Class I Division 2
- Available in 60° wide beam profile and 110° wide beam profile
- Anti-corrosion housing and made of copper free aluminum
- Tempered glass lens is impact and thermal shock resistant
- Available in 5000K (standard), 3000K and 4000K (optional)
- Lumen output: from 4,800 lumens to 9,600 lumens

Not all DL series are DLC qualified. For all qualified products, please visit: www.designlights.org/qpl

CERTIFICATION

Class I:	
Division 2:	Group C, D
Division 2:	Group A, B, C, D
Simultaneous Presence	
Classification may vary depending on the product configuration. Please follow catalogue information and exceptions.	



class-1
DIV-2
RATED

class-2
DIV-2
RATED

IP68
IP69K
CERTIFIED

IK10
IMPACT
CERTIFIED

NEMA
4X

DIRECT AC
DRIVERLESS



baa
babaa
COMPLIANT



DRIVERLESS HAZARDOUS LOCATION LED LUMINAIRE

The HLX is a direct to AC, linkable, 1" low-profile luminaire that is designed specifically for hazardous locations.



LINEAR LIGHT FOR INDUSTRIAL

- Mining
- Chemical & Petroleum
- Workstation
- Manufacturing Facilities
- Conveyor Belts
- Tunnel & Accessways
- Machine Lighting
- Construction Equipment
- Municipal Equipment



IP66
IP67
CERTIFIED

IK10
IMPACT
CERTIFIED

NEMA
4X

DIRECT AC
DRIVERLESS


GaN
SIC




baa
babaa
COMPLIANT

RADIATION RESISTANT LED LUMINAIRE

The RRX is an extremely compact LED luminaire design to be tolerant of radiation within the harsh environment of an accelerator.

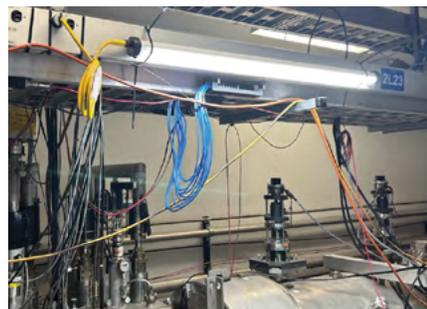

INTERIOR LIGHTING

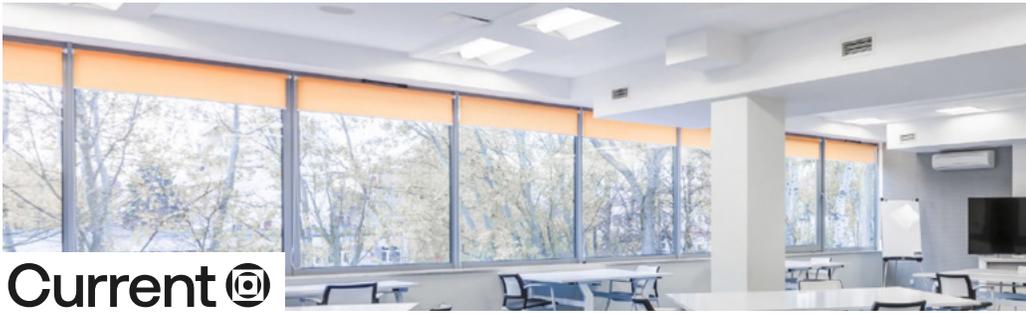

Columbia
LIGHTING

TROFFER
LCAT-S



prescolite
LITEBOX^{pro}

DOWNLIGHT



LITECONTROL
making light work™

LINEAR SUSPENDED
Pendant Indirect/Direct




ALBEO

ABV4 SERIES
• LED High Bay Lighting



LITECONTROL
making light work™

ABB EMERGI-LITE®
• A full range of emergency lighting solutions

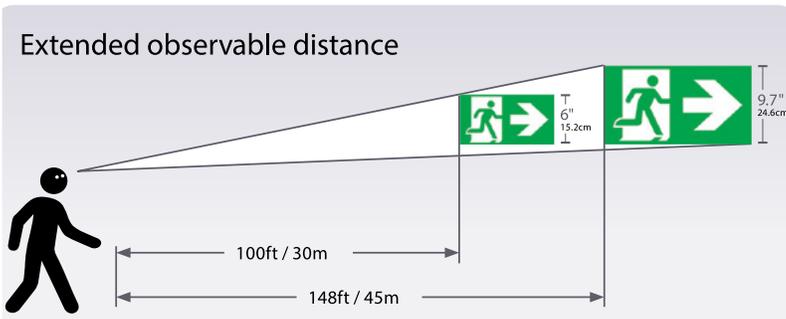



Area | Site | Roadway



Decorative Post Top



Ceiling | Canopy | Garage



Wall Mount



Floodlighting



Landscape



Bollards




In Grade



VIPER

Sizes 1-4 The Viper is an extremely versatile area/site luminaire which blends design, performance, and technology for a variety of applications.

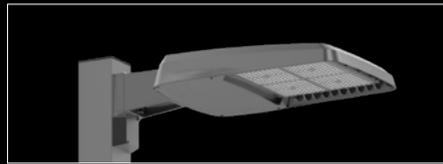

RATIO

Sizes 1-3 With a new spin on a classic rectilinear form, Ratio brings the traditional shoebox aesthetic into the next generation of LED lighting.



SLING AREA | SITE

The Sling Area comes in two sizes with a compact sleek design and simple installation.



SLING

Multi-purpose dusk-to-dawn LED luminaire provides general purpose area, security,



SLING BOLLARDS

Round and square bollards, featuring switchable wattage and CCT



SLING

LED floodlights in three sizes, featuring field switchable wattage and CCT.



WGH

Rugged glass refractor wallpacks in three sizes featuring field switchable wattage and CCT.



LNC-LNC2

Mid-size and compact LED wallpack for entry/perimeter applications.



EXO SG Sling Wall

The SG Sling is a slender wallpack/floodlight available in two sizes for a variety of applications.


FLOODS




PARKS & REC



LIGHTING DESIGN

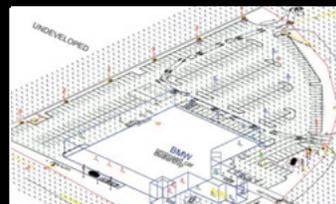

LIGHTING DESIGN

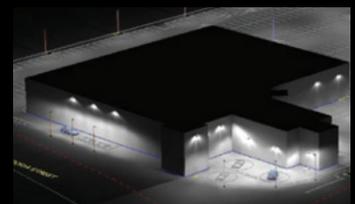

**NEW CANADIAN REGULATION PHASING OUT MERCURY
BASED LAMPS – FLUORESCENT & HID LAMPS**



Regulation Effective Date by Product Category

Regulation Type	Product Category				
	All Linear & Non-Linear Fluorescent	Screw Based Compact Fluorescent	Pin Based Compact Fluorescent	High Pressure Sodium Vapour High Intensity Discharge	Metal Halide High Intensity Discharge
Import and Manufacture Ban of Lamps for New Installations	1/1/2026	1/1/2026	1/1/2026	1/1/2029	1/1/2029
Replacement Lamps Exemption Period	From 1/1/2026 - 12/31/2027	None	From 1/1/2026 - 12/31/2027	Starting on 1/1/2029	Starting on 1/1/2029
Import and Manufacture Ban of Replacement Lamps	1/1/2028	None	1/1/2027	None	None
Selling Prohibition Start Date	1/1/2030	None	1/1/2030	None	None





LINEAR T8, T5 RETROFIT LED TUBES



FEATURES & BENEFITS

- Complete offering for everyday and more specialized applications
- Full selection of Type A, Type B and Type C solutions
- Innovative built-in safety features, shatter resistant coatings, high efficiency, and long-life premium upgrades also available
- Trusted life and warranty, 50,000 hr life with 5 year warranty and 70,000 hr life with 7 year warranty

Ballast Compatible (UL Type A)
Easy plug & play



- Uses fluorescent ballast
- No re-wiring required
- Low installation cost
- Direct replacement (lamp)
- Dimming limited by ballast
- Check compatibility

Ballast Bypass (UL Type B)

Simple Long-Term Solution



- Uses no ballast / driver
- Re-wire to bypass ballast
- Low future maintenance
- Retrofit Kit (lamp, label)
- Dimming impractical
- Consider misapplication fuse

External LED Driver (UL Type C)


Robust & Flexible System



- Uses external LED driver
- Replace ballast with driver
- Low voltage output
- Retrofit Kit (lamp, label, driver)
- Dimming driver (0-10V)
- Field-tunable driver settings

COMPACT FLUORESCENT - RETROFIT LED LAMPS

HORIZONTAL CONFIGURATION


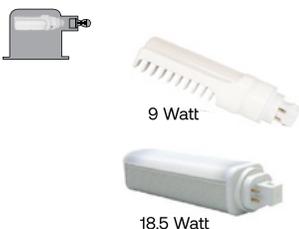


VERTICAL CONFIGURATION



LED HID REPLACEMENT LAMPS

Current's LED HID Standard and Selectable Replacement Lamps are designed to provide high output from a compact size. The length and diameter match HID ANSI profiles. These lamps feature omni directional light output, with similar distribution to traditional HID lamps. This enables GE LED lamps to fit in a variety of fixtures while providing equivalent light levels to HID, making it possible to upgrade more applications to LED without replacing an entire fixture. All of the GE LED lamps in this category are Type B, which means the fixture is re-wired to bypass the ballast. The lamp drawings below illustrate how similar in size Current's LED lamps are to traditional HID bulbs.

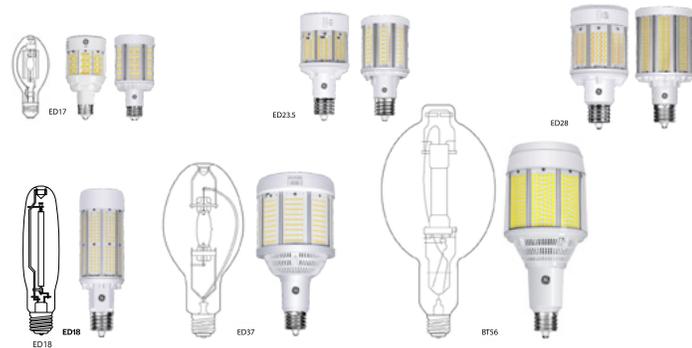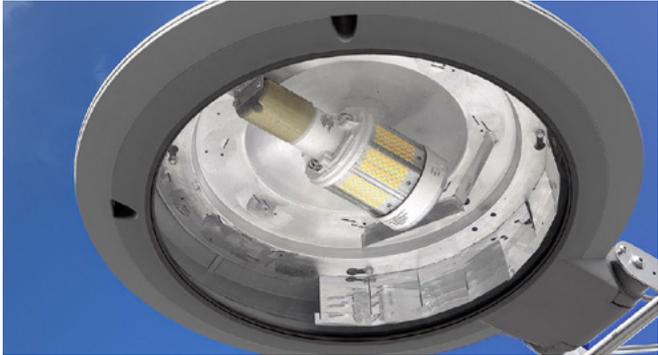

Lamp Drawings (not drawn to scale)



ONE SYSTEM WIRED & WIRELESS, INSIDE & OUT

INTELLIGENCE IS IN OUR DNA

- Utilizes a Distributed Network Architecture (DNA) to deliver unmatched reliability and scalability

INDOOR & OUTDOOR DEPLOYMENT

- Single System for any commercial site spanning indoor and outdoor applications.

CONNECTED LIGHTING PORTFOLIO


- Broad offering of NX enabled luminaires that simplify installation and system costs

SITE MANAGEMENT

- NX Network provides single user interface for system maintenance and configuration

BUILDING INTEGRATION

- The NX system is BACnet certified ensuring a seamless experience with existing building management systems

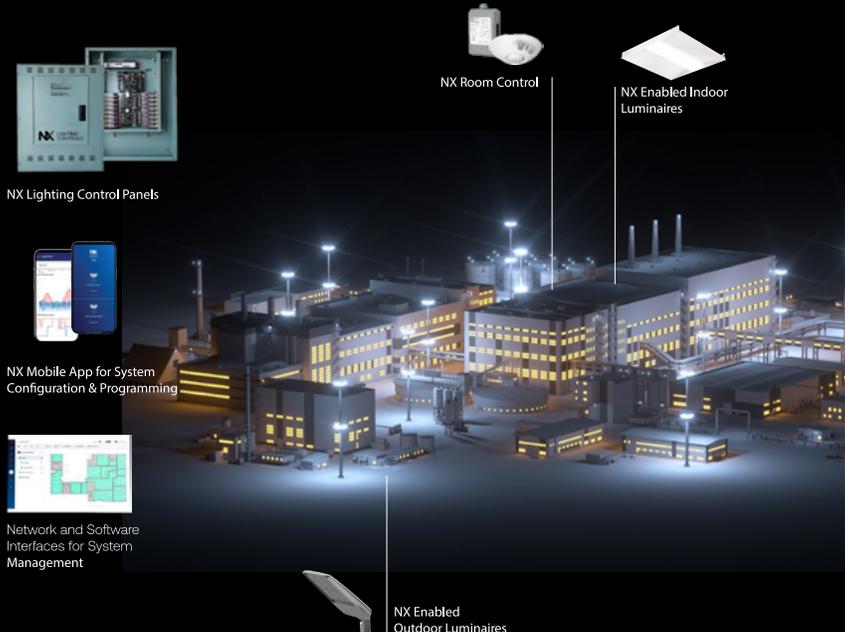



GS Lighting Group 30+ YEARS
 A division of Gross Sales Ltd.

- | | | | | | | | | |
|-------------------------------------|--|-----------------------------------|--|--|--|----------------------------------|--------------------------------------|--|
| Current
CONTROL SOLUTIONS | Current
FIXTURES & CONTROLS | Current
LAMPS & BALLAST | ALBEO | architectural
arealighting | BEACON | Columbia
LIGHTING | Daintree
WIRELESS CONTROLS | EVOLVE |
| EXO
OUTDOOR LIGHTING | FORUM | immersioN | KIMLIGHTING | kurt versen | lifeshield
lighting for complex spaces | LIGHTGRID | LIGHTSWEEP | LITECONTROL
making light work™ |
| Lumination | NX
LIGHTING CONTROLS | prescolite | SECURITY LIGHTING | SpectraSync | Tetra | WHITEWAY | ABB Emergi-Lite | ABB Hazlux |
| ACCLAIM
LIGHTING | alphabet | Amico | ARKANSAS LIGHTING
STAY ILLUMINATED | artika pro | BETHEL
INTERNATIONAL | bios | BLU Ecosystem | BOCCI |
| bruck | BubblyNet | CASTALDI | CECOCECO | CHRISTIE LITES | CRYSTORAMA | DARK | EDISON
LIGHTING GROUP | ETC |
| EUROfase | EUROfase
Function | EUROfase
HEATING | Everbrite | ewo | FERRO | FOCUS
INDUSTRIES | GHIDINI | GMLighting |
| HINKLEY
LIGHTING | HUNZA CANADA
Pure Outdoor Lighting | ILFARI | in-lite | J2
LIGHT | LARK | LightTape | LUCITALIA
MILANO | LUMCA
LIGHTING LIFE |
| LUMEN WARM | Luminart | LuxR
LED BY DESIGN | MAGIC LITE | Metalumen
Ideas brought to light | MODERN FORMS | New Star | PARIS MIRROR | PEERLESS
electro-electrique |
| PRiMA
LIGHTING | REFRESH
Feas™ | selux | SPI LIGHTING | TEHOMET
Industrial Control | TLS
Architecture Lighting | USI
UTILITY STRUCTURES | valmont | |
| Vesoi | WAC
LIGHTING
Responsible Lighting | ZANIBONI
LIGHTING | zilux
ARCHITECTURAL CHANNELS | | | | | |

Showroom Lighting Center:
 26 Glebe Street, Cambridge, Ontario, N1S 2P1
 Open: Monday – Friday 9:00 a.m. to 5:00 p.m.

Tel: 519-267-6262
 Email: sales@gslightinggroup.ca
 Website: www.gslightinggroup.ca



Book a design meeting, lighting audit or lighting seminar today!